

Serial Device Server, HelloDevice Lite Series, LS100/LS110/LS100W



The HelloDevice Lite Series, LS100/LS110/LS100W is a cost effective Serial Device Server that makes your legacy serial devices manageable via industry-standard 10Base-T Ethernet or WiFi network. Based on open network protocols such as TCP/IP, it gives you ultimate flexibility to your serial devices. The unique hardware and software design enables you to connect RS232 serial devices to Ethernet network at a minimal transition cost.

You could easily configure the HelloDevice LS100/LS110/LS100W by using Telnet or serial console port under the password protection support.

Features


- Connects legacy serial devices to 10Base-T Ethernet or 802.11b WiFi network
- Supports RS232 based serial devices via its DB9 serial port
- Serial data transfer rate up to 115Kbps
- Reliable TCP/IP protocol stack
- Low-price model for lowest transition cost
- Configuration via Telnet or serial port
- Management software for configuration and administration included
- Supports both wall and DIN-Rail style mounting
- Surge protector included. (LS110 only)
- Supports RFC 2217, Telnet COM Port Control Protocol. (LS110 only)

Typical application areas of the HelloDevice LS100/110/100W include:

- Industrial Automation
- Network management
- Retail/Point of Sale
- Remote metering
- Remote display
- Building automation
- Security/Access control System
- General data acquisition application
- Medical Automation

Panel Layout

LS100/110

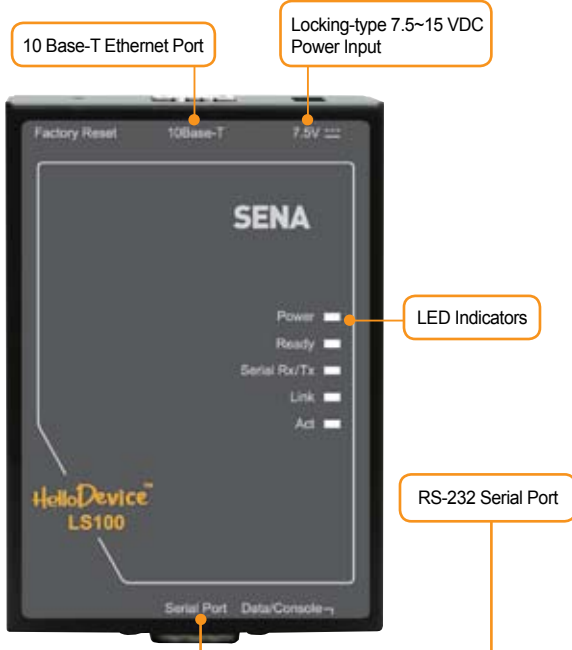

LS100W



HelloDevice Lite Series, LS100/LS110/LS100W

Specifications

Serial Interface

- Male DB9 serial port
- Serial speeds 1200bps to 115Kbps
- Flow Control: Hardware
- Signals
 - LS100/100W : RS232/Rx,Tx,RTS, CTS,DTR,DSR,GND
 - LS110 : RS232/Rx,Tx,RTS, CTS,DTR,DSR,GND,DCD

Network Interfaces

- LS100/110
10Base-T Ethernet
- LS100W
802.11b WiFi with Prism III compatible chipset
Supports Ad Hoc mode and Infrastructure mode
Supports 64/128-bit WEP security

Protocols

- | | | |
|------------------|------------------|------------------|
| • LS100 | • LS110 | • LS100W |
| - ARP, IP/ICMP | - ARP, IP/ICMP | - ARP, IP/ICMP |
| - TCP/IP, Telnet | - TCP/IP, Telnet | - TCP/IP, Telnet |
| - DHCP client | - DHCP client | - DHCP client |
| - PPPoE | - DNS | |

Security

- User ID & Password
- IP Address filtering (LS110 only)

Management

- Serial console port
- Telnet
- HelloDevice Manager software,
O/S support:Windows 98/Me/NT/2000/XP

Diagnostic LED

- | | |
|-----------------------------|-------------------------|
| • LS100/110 | • LS100W |
| - Ready | - Power |
| - Link and Act for Ethernet | - Link and Act for WiFi |
| - Serial Rx/Tx | - Serial Rx/Tx |
| - Power | - Ready |

Power

- LS100
7.5 ~ 15VDC, 300mA @ 7.5V
- LS110
7.5 ~ 15VDC, 300mA @ 9V
- LS100W
9 ~ 30VDC, 300mA @ 9V

Environmental

- Operating temperature : 0 ~ 50 C
- Storage temperature : -20 ~ 66 C
- Humidity : 90% Non-condensing

Physical properties

- Dimension (L x W x H) and Weight
- LS100/110:
100 x 72 x 25 (mm), 3.9 x 2.8 x 1.0 (in.), 240g
- LS100W:
100 x 72 x 25 (mm), 3.9 x 2.8 x 1.0 (in.), 300g

Certification

- FCC (A), CE, MIC

Warranty

- 5-year limited warranty

Ordering Information

- LS100** HelloDevice Lite 100 single-port serial device server
LS110 HelloDevice Lite 110 single-port serial device server

Includes:

- Quick Start Guide
- External 110V or 230V power supply
- Serial data cable
- CD-ROM

Optional Accessories:

- DIN-Rail mount kit



- LS100W** HelloDevice Lite single-port wireless serial device server

Includes:

- Quick Start Guide
- External 110V or 230V power supply
- Dipole antenna for LS100W
- Serial data cable
- CD-ROM

Optional Accessories:

- PAT : Parani-PAT Patch Antenna-SMA R/A Female-Right Handed
- RFC : Parani-RFC 1m Antenna Extension Cable for all antennas
- SLR : SMA-Male left handed to right handed adapter
- DIN-Rail mount kit

U.S. / Canada / South America

Tel : +1 (408) 573-7425 Fax: +1 (408) 907-3738

EU / Africa

Tel : +33 (0) 1 53 53 16 29 Fax: +33 (0) 1 70 24 70 90

Asia / Pacific

Tel : +82-2-571-8283 Fax: +82-2-573-7710

Contact us via E-mail

General Information : info@sena.com
 Sales & Distribution : sales@sena.com
 Technical Support : support@sena.com

For more information, please visit us at <http://www.sena.com>