

Bluetooth Access Point, Parani™ MSP1000



Features


- Connects Bluetooth devices to 10/100 base-T Ethernet
- Supports Bluetooth 2.0+EDR, up to 3Mbps throughput
- 7/14/28 Bluetooth Connections support
- Supports Bluetooth profiles for Serial Port, LAN Access, PAN, File Transfer and Dial up Networking.
- Dual Ethernet support for fail-over operation
- Ideal wireless solution for the replacement of the wired multi-port serial card.
- Easy-to-use COM-Port redirector support, RFC 2217, Telnet COM Port Control Protocol
- Flexible TCP/UDP host mode support: Multiple host connection/data transfer
- Supports system logging & port logging
- Supports Python Script Engine for user customization
- Supports firmware upgrade via web, hyper terminal program or etc.

The Parani-MSP1000 series is a Bluetooth Access Point to enable Bluetooth devices to be connected to 10/100Mbps Ethernet network. Parani-MSP1000 supports 7, 14, and 28 Bluetooth connections according to the model, and it supports up to 3Mbps throughput through Bluetooth 2.0+EDR specification. Parani-MSP1000 series is a class 1 Bluetooth device that supports 150m using basic dipole antenna and up to 1 km using patch antenna. Parani-MSP1000 series supports such profiles as Serial Port, LAN access, PAN and FTP for various applications. For ideal serial cable replacement applications, we provide free COM/TTY port redirector software for Windows/Linux. Parani-MSP1000 series is based on embedded Linux system and it supports strong security mechanisms such as SSL, TLS, SSH and IP filtering functions. Users also can customize the features of the box easily by using Python script.

Typical application areas of the Parani-MSP1000 include:

- Truck/Bus monitoring system
- Car Diagnostics
- Wireless POS system
- Wireless Factory monitoring PLC programming
- Wireless machine (healthcare/industrial) monitoring
- Wireless Printing
- Wireless logistics

Panel Layout

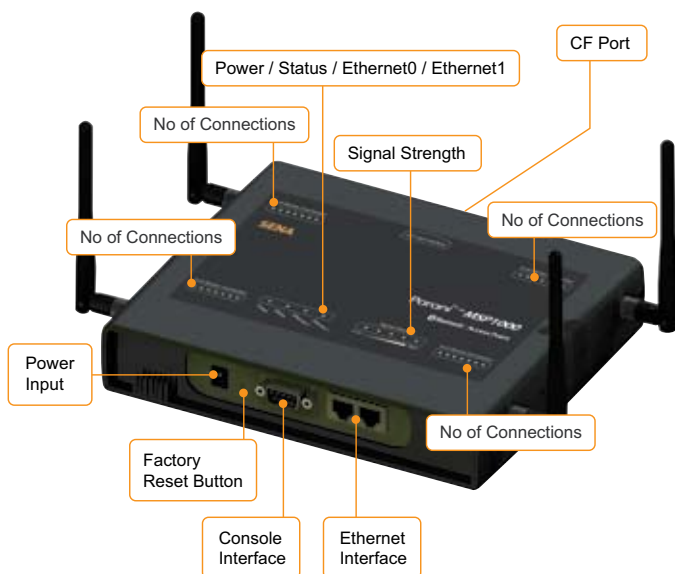

Specifications

Ethernet Interface:

- Dual 10/100 Base-T Ethernet with RJ45 connector
- Supports Static IP and Dynamic IP address

Bluetooth Interface:

- Bluetooth v2.0 + EDR
- Class 1
- Profiles - Serial Port, LAN Access, PAN, Dial up Networking, File Transfer
- Data rate - up to 3Mbps
- Working distance

	Parani-SD100	Parani-ESD110	
DAT-G01R Antenna	- Stub(Default) Antenna	up to 150m	
DAT-G01R Antenna	- DAT-G01R Antenna	up to 200m	
DAT-G01R Antenna	- DAT5-G01R Antenna	up to 300m	
DAT-G01R Antenna	- PAT-G01R Antenna	up to 500m	
DAT5-G01R Antenna	- DAT5-G01R Antenna	up to 400m	
DAT5-G01R Antenna	- PAT-G01R Antenna	up to 600m	
PAT-G01R Antenna	- PAT-G01R Antenna	up to 1000m	

Max. Tx power: +17dBm(using DAT-G01R Antenna)

Receive Sensitivity: -88dBm

Point to multi point connectivity:

- Up to 28 connections

Network Protocols:

- IPv4, ICMP, ARP, TCP, HTTP, telnet, TFTP
- SSH, HTTPS, SSL/TLS, DNS
- SCP/SFTP/FTP, syslog, NTP
- SNMP, SMTP, Dynamic DNS

Security:

- IP Filtering, SSH v2, SSL/TLS, SNMP

CF Port:

- Flash memory

Logging:

- Syslog server, CF memory

Real Time Clock: Built-in support

Customization:

- Python Script engine, ELDK v4.0, 2MB internal user space

Management:

- Windows Utility
- Web, Telnet, Serial Console

Firmware Upgrade:

- Telnet/SSH, Web, Bootp, CF memory, Zmodem, TFTP

Diagnostic LED:

- POWER, STATUS, Ethernet0, Ethernet1
- Signal Strength, No of Connections

Power:

- 5VDC
- Nominal Current Consumption : 1.2A@ 5VDC approximately

Environmental:

- Operating temperature:
0 c to 50 c
- Storage temperature:
-30 c to 85 c
- Humidity: 90% Non-condensing

Physical properties:

- Dimension (L x W x H):
203 x 170 x 44 (mm)
7.99 x 6.69 x 1.73 (in.)
- Weight:
MSP1000A : 1414g
MSP1000B : 1432g
MSP1000C : 1468g

Certification:

- FCC, CE, MIC, TELEC

Warranty:

- 3-year limited warranty

Ordering Information

- MSP1000A** Parani-MSP1000A Industrial Bluetooth Access Point with 7 connections support
- MSP1000B** Parani-MSP1000B Industrial Bluetooth Access Point with 14 connections support
- MSP1000C** Parani-MSP1000C Industrial Bluetooth Access Point with 28 connections support

Includes :

- DC Power Adapter
- DAT-G01R Antenna: 3 dBi Dipole Antenna-RP-SMA-Standard thread for Parani-MSP1000 and PSx10W
- Serial data cable
- Ethernet straight cable
- Wall mount bracket
- Quick Start Guide
- CD-ROM

Optional Accessories :

- DAT5-G01R Antenna: 5 dBi Dipole Antenna-RP-SMA-Standard thread for Parani-MSP1000 and PSx10W
- PAT-G01R Antenna: 9 dBi Patch Antenna-RP-SMA-R/A-Standard thread for Parani-MSP1000 and PSx10W
- RFC-G01R: 1m Antenna Extension Cable-RP-SMA-Standard thread for PAT-G01R

For more information, please visit us at <http://www.sena.com>

U.S. / Canada / South America

Tel : +1 (408) 573-7425 Fax: +1 (408) 907-3738

EU / Africa

Tel : +33 (0) 1 53 53 16 29 Fax: +33 (0) 1 70 24 70 90

Asia / Pacific

Tel : +82-2-571-8283 Fax: +82-2-573-7710

Contact us via E-mail

General Information : info@sena.com
 Sales & Distribution : sales@sena.com
 Technical Support : support@sena.com

SENA

www.sena.com